

e-ISSN:2582-7219



INTERNATIONAL JOURNAL OF MULTIDISCIPLINARY RESEARCH IN SCIENCE, ENGINEERING AND TECHNOLOGY

Volume 5, Issue 5, May 2022



INTERNATIONAL
STANDARD
SERIAL
NUMBER
INDIA

Impact Factor: 7.54



6381 907 438



6381 907 438



ijmrset@gmail.com



www.ijmrset.com



An minimization of Solar Energy for Farming using IOT Techniques

Deore Vishal Rajendra, Jagtap Prashant Babasaheb, Salve Ganesh Ravindra, Prof. R. J. Nikam,

Dr. Dipak. P. Kadam

Department of Electrical Engineering, MET Bhujbal Knowledge City, Nashik, India

ABSTRACT: In solar energy, solar panels are the main generation elements. In comparison, gained power from the photovoltaic solar panel is a primary factor & reflects the panel performance. This affects many parameters like dust density, light intensity, and ambient temperature. To generate energy at full efficiency, timely maintenance like cleaning & solving electrical issues is necessary. Delay in maintenance causes a reduction in generation & even damage to the system. By knowing the expected amount of generation of energy from solar panels, it is also possible to manage the utilization & consumption of power in a better way.

This paper will use current and voltage sensors to measure solar panels' generating power. By detecting generation deficiency, we can find defective panels & improve the generation by completing maintenance on time. By detecting dust in the air tentative day of maintenance will be predicted. With the help of vibration sensors, physical damage to the panel mounting will be detected. Also, safety measures can be taken related to theft by detecting the movement of the panel. By measuring the amount of sunlight, a generation can be predicted for the day so that energy can be managed in an efficient way. With the help of IoT, all the parameters & alerts will be shown on the webpage

KEYWORDS: IoT, Sensors, carbon technology, solar panel,

I. INTRODUCTION

Solar energy has been recognized as the most promising source of renewable energy all over the world. Solar energy possesses the potential to replace high carbon intensive technology [1]. As per the recent IEA declaration, renewable is not a niche fuel anymore. It has become a mainstream fuel. Solar and wind are surpassing the other renewable energy sources, being the largest share in the renewable market. The drastic decline in the cost of solar PV modules has accelerated its growth and has led energy enthusiasts all over the world to consider it. Because of the increasing demand for solar energy, the efficiency of solar panels is more important than ever. However, solar panels are very inefficient. Soiling of PV panels drops the panel efficiency even further. This accumulation of dirt on the panels is a well-documented effect that can cause a loss of efficiency [1]-[6].

Many factors are affecting solar panel performance. Some factors are proportional positively to the obtained electrical power, while other factors affect negatively [1]-[4]. Light intensity level represents an important parameter with respect to the effectiveness of the solar panel, the collected solar energy converted to the electrical power is proportional to the instantaneous level of light intensity [5]-[7]. Dust density level is the other parameter that represents an obstacle between light beams and the front surface of the solar panel. The dust's particles deposit on the panel, which will reduce the amount of radiation falling on the PV cells from the sunlight [6]. Besides the variety of dust density in every region, the angle of the surface can collect more dust. The more horizontal the surface, the more dust particles will be collected on that surface [9]. Ambient temperature has a high priority effect on the solar panel's effectiveness. In other words, increasing the panel temperature value leads to reducing the delivered power from the panel. Ambient humidity also negatively affects the panel performance [11].

Many electronic monitoring systems are proposed in the literature for continuous measuring, recording, and/or controlling functions [12]-[14]. Microcontroller unit is used for the mentioning/controlling functions in many studies due to the easy programming and connection with the personal computer for interaction activities, i. e., program loading, data collecting, and analysis.



Since a solar energy generation system is a high-cost investment, it must be run at full efficiency. In this paper, automation is performed with the help of sensors to make sure that solar farms run at full efficiency and detect a situation in case of any maintenance. IOT technique is used to visualize and alert.

Need of Paper

Solar energy is the best available option to solve the energy crisis. Where as enhance the generation capacity and frequent maintenance is very important to get uninterrupted power. Generation of solar panels affects due to dust that settles on panel surface, or any electrical fault. Since solar panels are costly, any damage in the structure or ground surface may cause to break panel or change the direction of panel which may reduce the amount of sunlight collected by panel. Electrical maintenance is also important for solar systems due to fluctuating amount sunlight throughout the day and year, solar panel generated wide range of voltages. With this, changing environmental conditions may damage the wiring. Since the solar energy generation is limited for day time, prediction of generating solar power may help to manage the consumption.

Objectives of Paper

Since solar energy generation system is high cost investment, it must be run at full efficiency. In this paper, an automation is performed with the help of sensors to make sure that solar farm run at full efficiency and detect situation in case of any maintenance. Objectives of the paper are:

- Measure & monitor power ($V \cdot I$) generation of each panel and comparing that to known value, low efficiency panel can be detected. Once the faulty panel identified, immediate maintenance can be done.
- By measuring amount of sunlight & atmospheric dust, total generation for the day will be calculated.
- Measure & monitor dust in air, the tentative day of maintenance will be calculated.
- Using the vibration sensor, motion in the solar panel mounting will be detected. With this alert, physical damage to the system can be avoided. It will also protect panel from thief.
- Upload all the parameters & alert on webpage using IOT.

II. SYSTEM DESIGN

Design of Solar Charge Controller

Output of solar panel depends on amount of sunlight fall on it. More sunlight gives more voltage whereas less sunlight cause reduction in output voltage. Maximum output voltage of panel we are using is 18V. Whereas as per the battery requirement, we need constant 13V dc to charge the battery. To satisfy this requirement, an variable voltage regulator IC as shown in figure bellow.

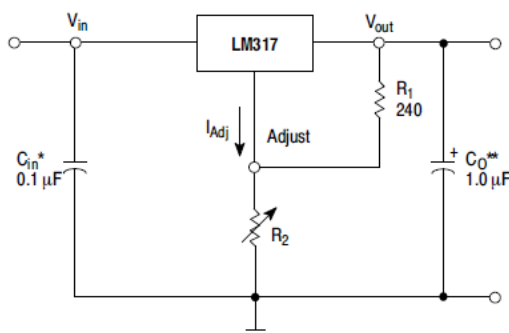


Figure 1: LM317 Basic Configurations



In above figure, C_{in} is required if regulator is located an appreciable distance from power supply filter. C_o is not needed for stability, however, it does improve transient response. Since I_{Adj} is controlled to less than 100 uA. The error associated with this term is negligible in most applications. As per the requirement of 13V output, consider $R1=240$ ohm. So as per the equation,

$$V_{out} = 1.25V(1 + \frac{R2}{R1})$$

$$13 = 1.25V(1 + \frac{R2}{240})$$

$$R2 = (\frac{13}{1.25} - 1) * 240$$

$$R2=2256 \text{ Ohm}$$

$$R2=2.256 \text{ KOhm}$$

As there is no resistor of this value, a variable resistor of 10KOhm can be used.

Design of Voltage Measurement Circuit:

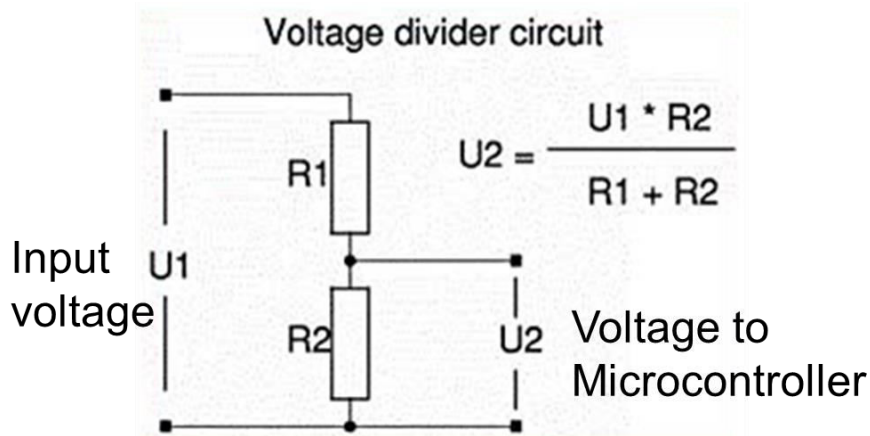


Figure 2: Voltage Divider Arrangement

To measure the voltage coming from panel, it need to be given on analog input pin of microcontroller. But before that its important to bring it bellow 5V. For which an voltage divider circuit is needed. To reduce the voltage to be measured upto 5v max

Insert the values of $V1$ & $V2$ chose any value for $R2$, & calculate value for $R1$ using formulae,

$$V2 = (V1 * R2) / (R1 + R2)$$

For, $V1=18$ & $V2=4$, let $R2= 10\text{Kohm}$

$$R1= 35 \text{ KOhm}$$



Interfacing of Buzzer With Microcontroller:

The digital buzzer needs a supply of 5V and 50mA maximum to generate sound at full intensity. The HIGH signal at the microcontroller output pin generated 5V and 200mA maximum current which is sufficient for buzzer. So it can be directly connected to the output pin of microcontroller.

Circuit Diagram

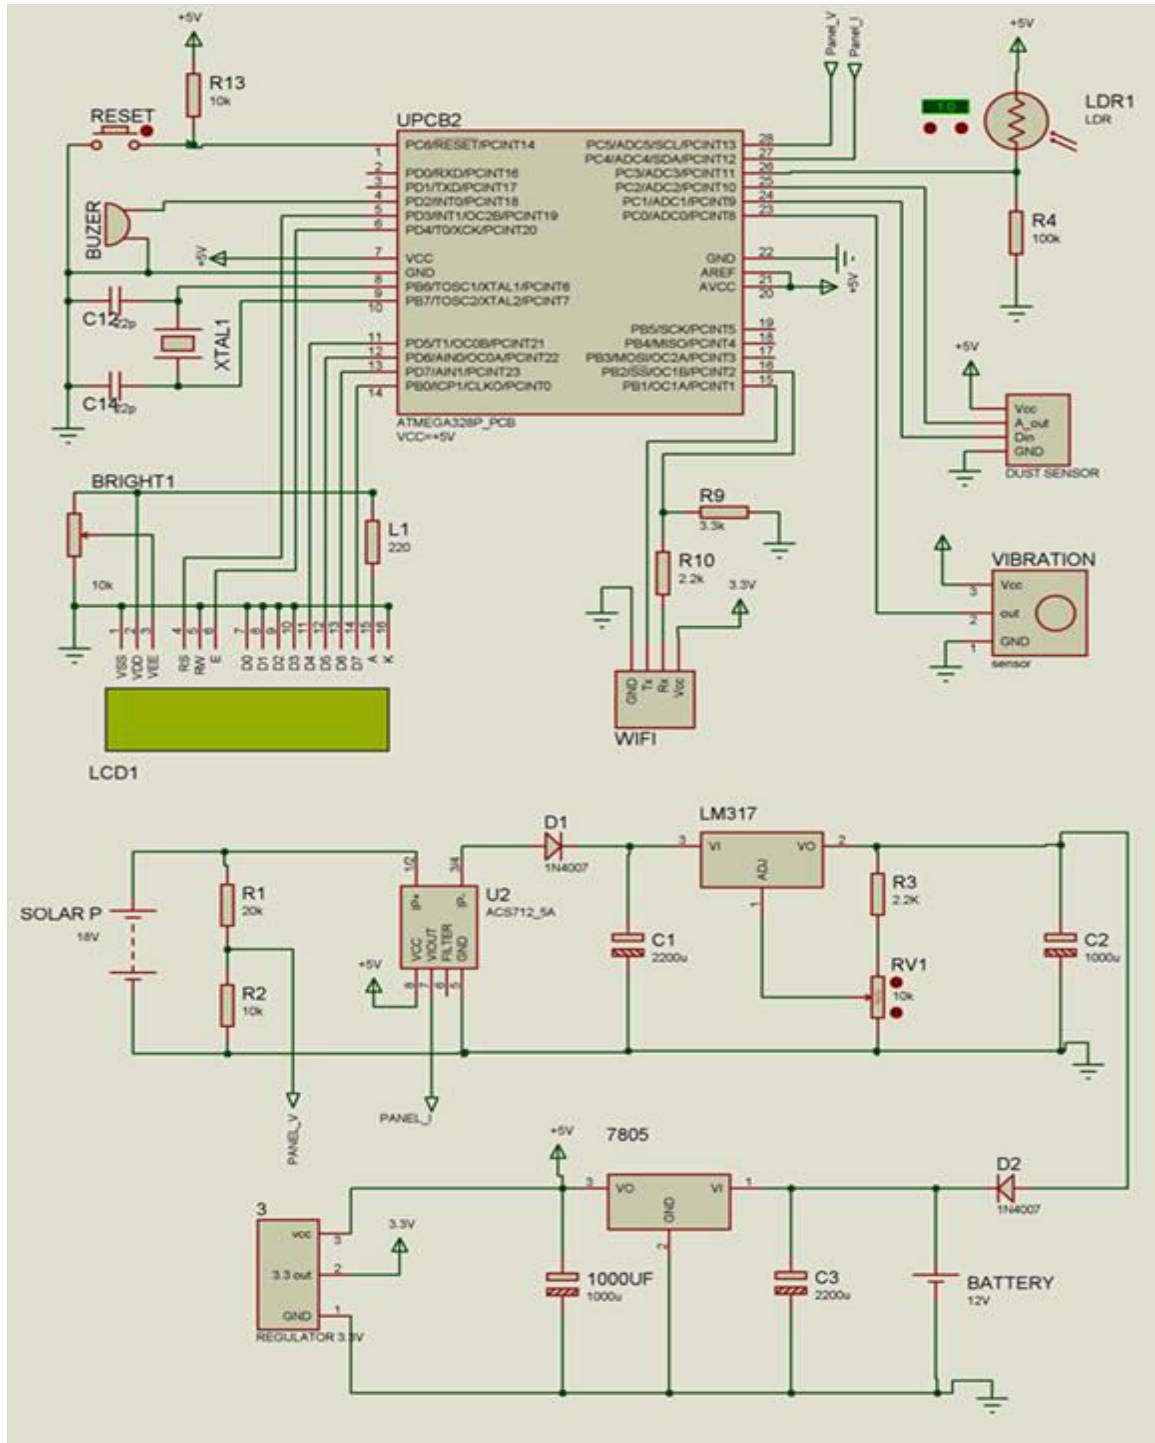


Figure 2: Circuit Diagram of System



III. SIMULATION RESULTS


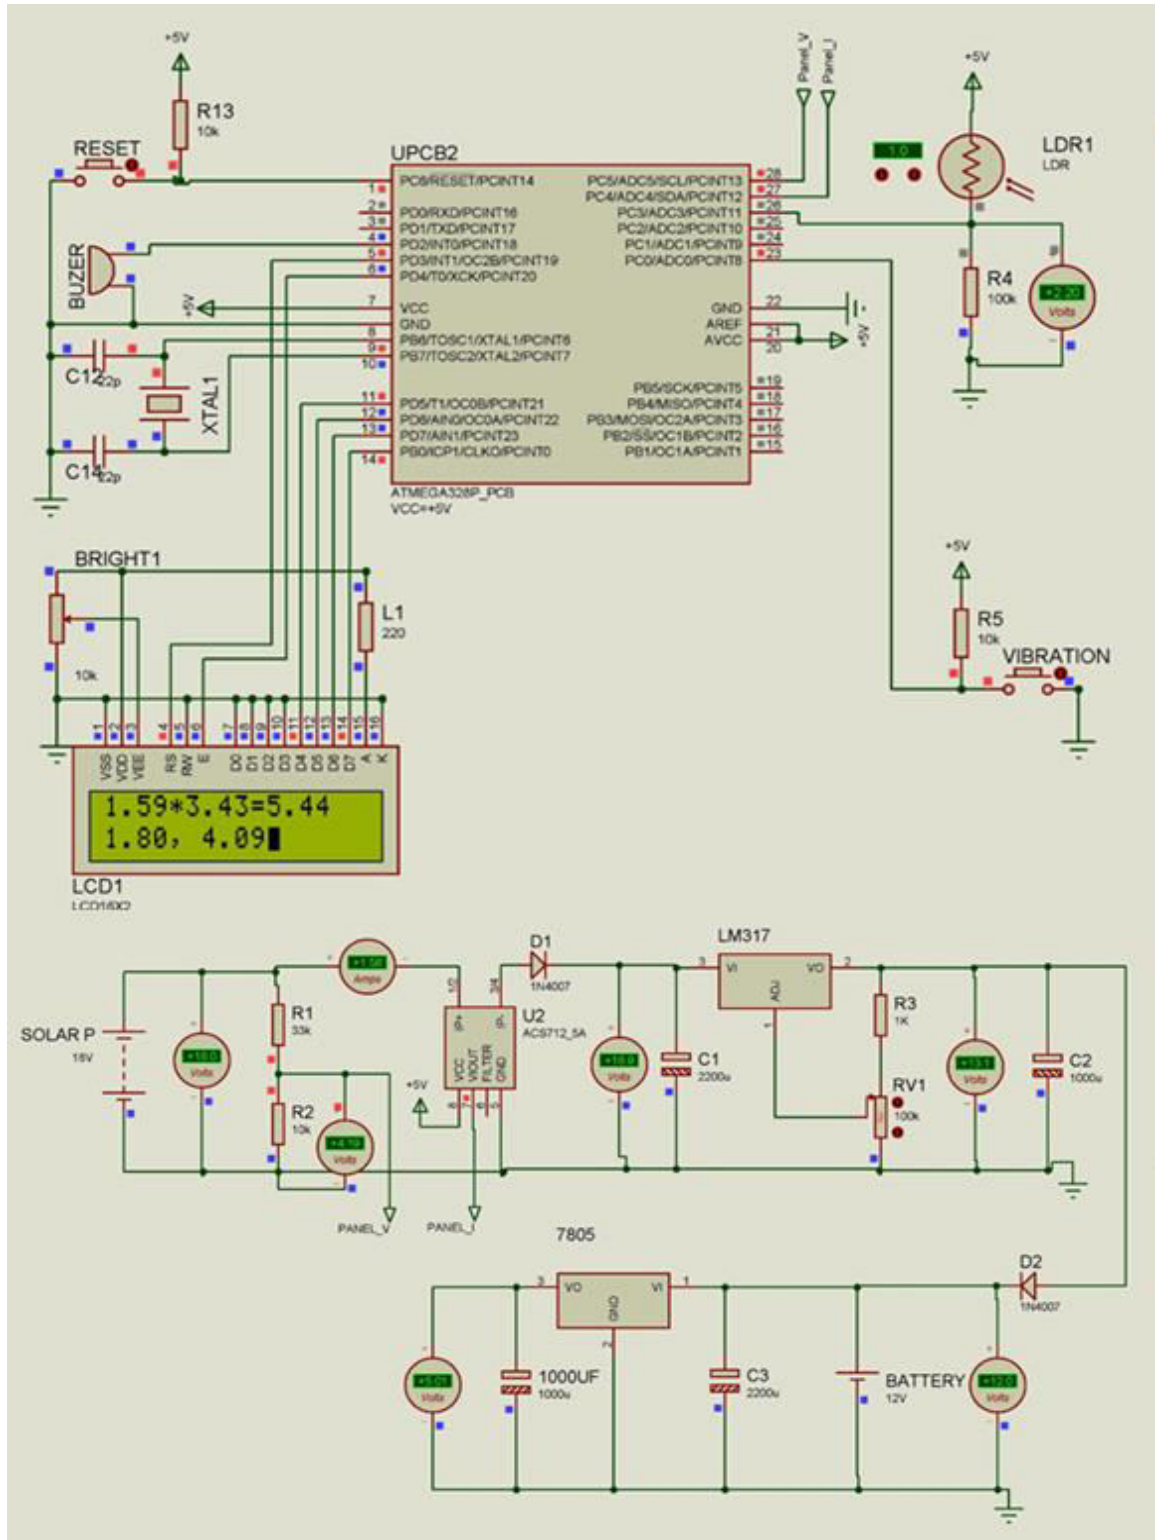


Figure 4: Simulation Results




IV. RESULTS & DISCUSSION

Test Results:

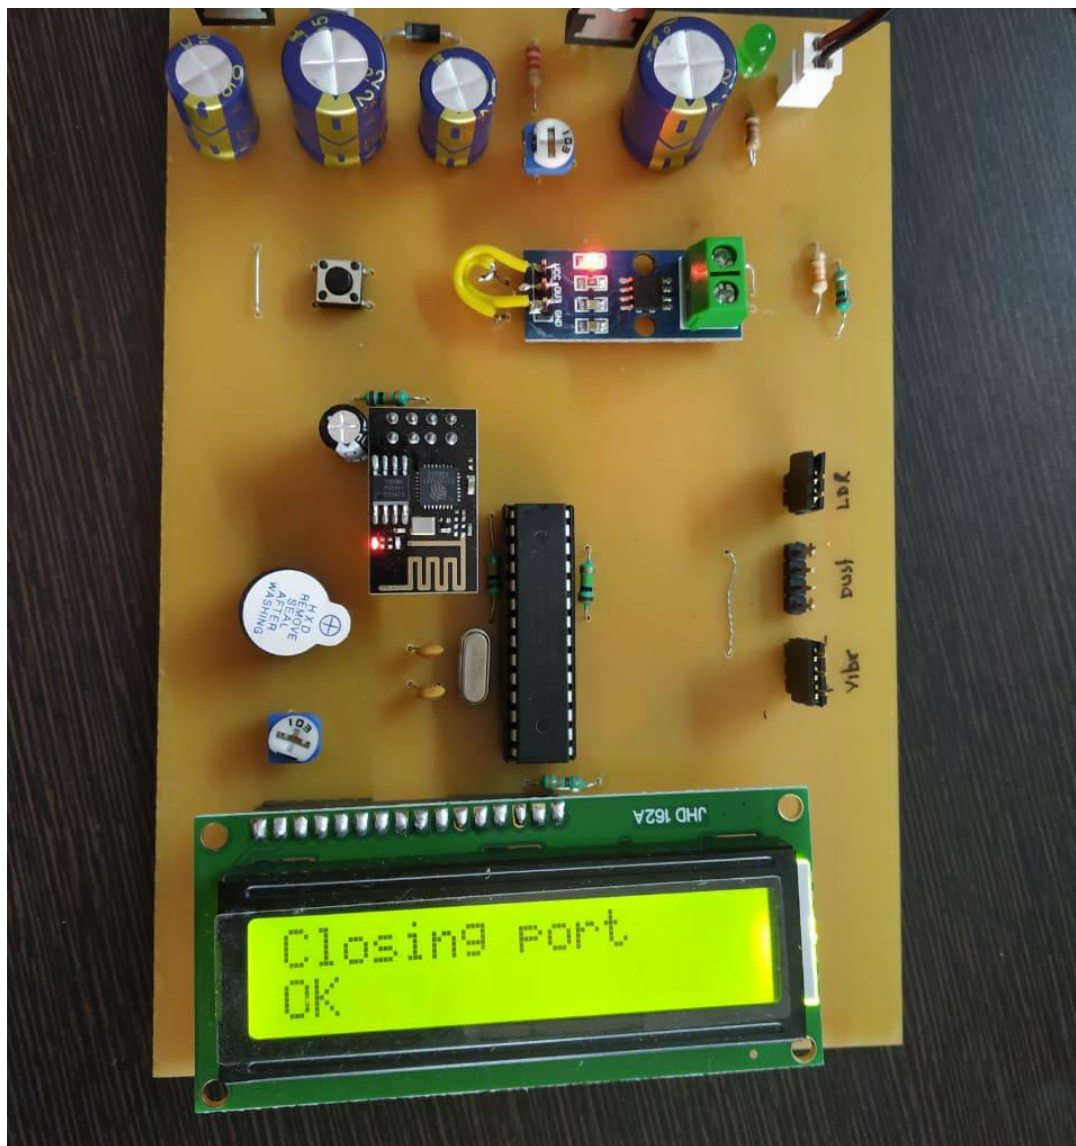

Advantages

- Automatic detection of low efficiency panel.
- Improves maintenance speed by providing alert.
- Security from theft & immediate alert.
- Automatic prediction of energy generation for the day.
- Cleaning maintenance prediction.



- Shows all the parameters & alert on webpage using IOT
- No external power source required since system operates on self-generated solar energy
- Provides uninterrupted monitoring 24x7.

Limitations

- Design is complex due to multiple devices and sensors.

Application

- For solar farms
- Domestic solar panels
- Panel testing facilities to detect the faulty panel

Future Scope

Though the paper sounds good, there is always scope for development in future. In this paper a proper interface for webpage or android application can be designed in future.

V. CONCLUSION

We believe that this paper will be extremely helpful for increasing the efficiency and maintenance alert for solar power plants. This will ultimately reduce the troubleshooting time and manpower needed for maintenance work. Also with the features of energy generation prediction and cleaning time prediction, it will be easy to manage things. Due to use of IOT, a remote monitoring is possible.

In this paper by considering all the situations and possibility, we decided the objectives for paper and chosen components which are helping to achieve the desire target. Though, design of circuit is critical due to non-availability of some of module in Protius software. Whereas due to the use of Arduino development tools, reduce difficulties during programming & troubleshooting was reduced.

REFERENCES

- [1] D Saravanan; T Lingeswaran, "Monitoring Of Solar Panel Based On IOT" IEEE International Conference on System, Computation, Automation and Networking (ICSCAN) 2019.
- [2] Ahmad Amhani; Hussain A. Attia "Online multi-parameters electronic monitoring system for solar photovoltaic panel applications" International Conference on Electrical and Computing Technologies and Applications (ICECTA) 2017
- [3] Soomin Lee; Sehyeong Lee; Laith Ellis; Anthony H Smith; Minsun Lee "Design of Solar Panels Efficiency Monitoring System" IEEE International Conference on Consumer Electronics - Asia (ICCE-Asia) 2020
- [4] Pritam Pokhra, Rajeshwari, Raj Kumar Yadav, "A Paper Report on automatic Sun Tracking Solar Panel Based on Open Loop Concept", International Journal of Engineering and Applied Sciences (IJEAS), May 2020
- [5] Babu K, Dinesh kumar P, Kamala priya S, Kathirvel P, "Solar Panel Cleaning Robot", International Journal of Innovative Science and Research Technology, 2018
- [6] K.G.Srinivasan, Dr.K.Vimaladevi, Dr.S.Chakravarthi., "Solar Energy Monitoring System by IOT", Special Issue Published in Int. Jnl. Of Advanced Networking & Applications (IJANA), 2018
- [7] Purusothaman, SRR Dhiwaakar, et al. "Implementation of Arduino-based multi-agent system for rural Indian microgrids." 2013 IEEE Innovative Smart Grid Technologies-Asia (ISGT Asia). IEEE, 2013.
- [8] Kabalci, Ersan, Alper Gorgun, and Yasin Kabalci. "Design and implementation of a renewable energy monitoring system." Power Engineering, Energy and Electrical Drives (POWERENG), 2013 Fourth International Conference on. IEEE, 2013.



- [9] Jiju, K., et al. "Development of Android based on-line monitoring and control system for Renewable Energy Sources." Computer, Communications, and Control Technology (I4CT), 2014 International Conference on IEEE, 2014.
- [10] Goto, Yoshihiro, et al. "Integrated management and remote monitoring system for telecommunications powerplants with fully DC-powered center equipment." INTELEC 07-29th International Telecommunications Energy Conference. IEEE, 2007.
- [11] Suzdalenko, Alexander, and Ilya Galkin. "Case study on using non-intrusive load monitoring system with renewable energy sources in intelligent grid applications." 2013 International Conference-Workshop Compatibility and Power Electronics. 2013.
- [12] Nkoloma, Mayamiko, Marco Zennaro, and Antoine Bagula. "SM 2: Solar monitoring system in Malawi." Kaleidoscope 2011: The Fully Networked Human? - Innovations for Future Networks and Services (K-2011), Proceedings of ITU. IEEE, 2011.
- [13] Md. Masud Ali Shah; Md. Shahariar Parvez; Abir Ahmed; Md. Rifat Hazari "IoT Based Power Monitoring of Solar Panel Incorporating Tracking System" International Conference on Automation, Control and Mechatronics for Industry 4.0 (ACMI) 2021.
- [14] Sivagami P; Jamunarani D; Abirami P; Pushpavalli M; Geetha V; Harikrishnan R, "Review on IoT Based Remote Monitoring for Solar Photovoltaic System", International Conference on Communication information and Computing Technology (ICCICT) 2021

Websites:

- [15] <http://www.ijrucc.org>
- [16] <http://www.learningaboutelectronics.com>
- [17] <https://www.arduino.cc>
- [18] <https://github.com>



INNO SPACE
SJIF Scientific Journal Impact Factor
Impact Factor
7.54

ISSN

INTERNATIONAL
STANDARD
SERIAL
NUMBER
INDIA



INTERNATIONAL JOURNAL OF MULTIDISCIPLINARY RESEARCH IN SCIENCE, ENGINEERING AND TECHNOLOGY

| Mobile No: +91-6381907438 | Whatsapp: +91-6381907438 | ijmrset@gmail.com |

www.ijmrset.com